
PXEB5422B001 Datasheet



Product Name // 4 Channel Flange Mount to LC Connector **Cable Assembly**





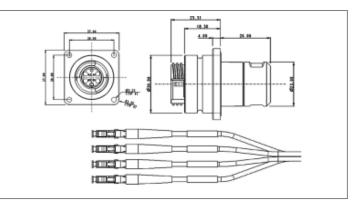

// Product Description:

- A Terminated Flange Mount Bulkhead (FMBH) Connector with 4 (OM1) LC terminated independent cables - 1m Long Cable Assembly
- \bigcirc Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Flange Mount Lanyard Included
- 0 Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- \bigcirc Available in 4 Channel
- Available in Flange Mount to SC Cable Assembly

// General Information:

Product Display Title: 4 Channel Flange Mount to LC Connector Cable Assembly

Product Family: Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam

<2dB Max Insertion Loss: Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grev

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body Contact Type: Expanded Beam Coupling Type: Screw

30mm Diameter Over Coupling Ring Mm: OM1 Fibre Mode:

Flamability Rating: UL94V-0 Function: EB Flange Mount to LC Double Ended Fiber Cable

IP68 Ip Rating: Material Finish: Max Operating Temperature:

Min Operating Temperature: Rohs Compliant:

Matt +80°C -50°C Yes

// Product PDF Links

5000 Series Expanded Beam Product.

// Product 3D CAD Model Links

PXEB5422B0013D CAD Model