
## PXEB5422B002 Datasheet



## Product Name // 4 Channel Flange Mount to LC Connector **Cable Assembly**





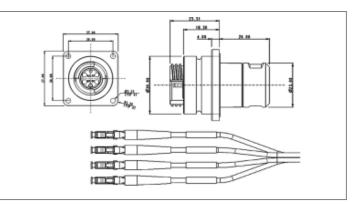

## // Product Description:

- A Terminated Flange Mount Bulkhead (FMBH) Connector with 4 (OM1) LC terminated independent cables - 2m Long Cable Assembly
- $\bigcirc$ Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Flange Mount Lanyard Included
- 0 Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- a Available in 4 Channel
- Available in Flange Mount to SC Cable Assembly

## // General Information:

**Product Display Title:** 4 Channel Flange Mount to LC Connector Cable Assembly

**Product Family:** Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam

<2dB Max Insertion Loss: Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grev

**Body Material:** Polycarbonate/Polybutylene Terephthalate (PC/PBT)

**Body Material Type:** Plastic Body Contact Type: Expanded Beam Coupling Type: Screw

30mm Diameter Over Coupling Ring Mm: OM1 Fibre Mode: Flamability Rating: UL94V-0

Function: EB Flange Mount to LC Double Ended Fiber Cable

IP68 Ip Rating: Material Finish: Matt Max Operating Temperature: Min Operating Temperature:

+80°C -50°C Rohs Compliant: Yes





// Product 3D CAD Model Links

