
## PXEB5422C001 Datasheet



View Product Page

<u>bulg</u>in

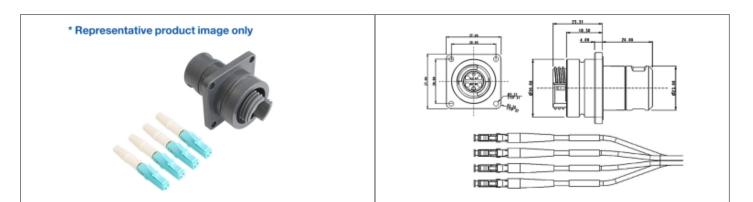

## // Product Description:

- A Terminated Flange Mount Bulkhead (FMBH) Connector with 4 (OM3) LC terminated independent cables - 1m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Flange Mount Lanyard Included
- O Mates with Plug Connectors (hermaphroditic)
- O Operating Temperature -50°C to +80°C
- O Available in 4 Channel
- O Available in Flange Mount to SC Cable Assembly

## // General Information:

Product Display Title: Product Family: Product Series: Max Insertion Loss: Avg Insertion Loss: Body Colour: **Body Material:** Body Material Type: Contact Type: Coupling Type: Diameter Over Coupling Ring Mm: Fibre Mode: Flamability Rating: Function: Ip Rating: Material Finish: Max Operating Temperature: Min Operating Temperature: **Rohs Compliant:** 

4 Channel Flange Mount to LC Connector Cable Assembly Circular Fiber Connectors 5000 Series Expanded Beam <2dB <1.5dB Dark Grev Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Expanded Beam Screw 30mm OM3 UL94V-0 EB Flange Mount to LC Double Ended Fiber Cable IP68 Matt +80°C -50°C Yes

## // Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5422C0013D CAD Model