
## PXEB5422C005 Datasheet



## Product Name // 4 Channel Flange Mount to LC Connector **Cable Assembly**



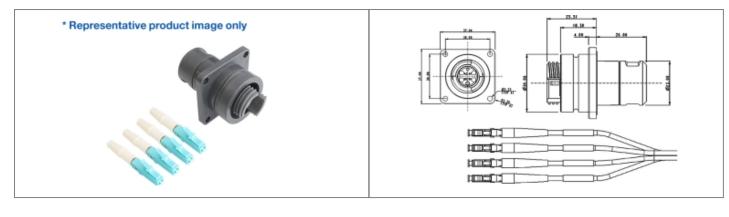

## // Product Description:

- A Terminated Flange Mount Bulkhead (FMBH) Connector with 4 (OM3) LC terminated independent cables - 5m Long Cable Assembly
- $\bigcirc$ Designed to MIL-DTL83526D
- 0 Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Flange Mount Lanyard Included
- 0 Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- $\bigcirc$ Available in 4 Channel
- Available in Flange Mount to SC Cable Assembly

## // General Information:

**Product Display Title:** 4 Channel Flange Mount to LC Connector Cable Assembly

**Product Family: Product Series:** 5000 Series Expanded Beam

Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grev

**Body Material:** Polycarbonate/Polybutylene Terephthalate (PC/PBT)

**Body Material Type:** Plastic Body Contact Type: Expanded Beam Coupling Type: Screw

30mm Diameter Over Coupling Ring Mm: OM3 Fibre Mode:

Flamability Rating: UL94V-0 Function: EB Flange Mount to LC Double Ended Fiber Cable

Material Finish: +80°C Max Operating Temperature: Min Operating Temperature: -50°C

IP68 Ip Rating: Matt

**Rohs Compliant:** Yes

// Product PDF Links // Product 3D CAD Model Links

5000 Series Expanded Beam Product.

PXEB5422C0053D CAD Model