
PXEB5423C001 Datasheet



Product Name // 4 Channel Flange Mount to SC Connector **Cable Assembly**



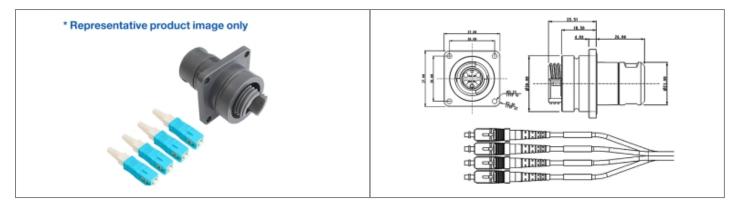

// Product Description:

- A Terminated Flange Mount Bulkhead (FMBH) Connector with 4 (OM3) LC terminated independent cables - 1m Long Cable Assembly
- \bigcirc Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Flange Mount Lanyard Included
- 0 Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Ω Available in 4 Channel
- Available in Flange Mount to LC Cable Assembly

// General Information:

Diameter Over Coupling Ring Mm:

Product Display Title: 4 Channel Flange Mount to SC Connector Cable Assembly

Product Family: Product Series: 5000 Series Expanded Beam

Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grev

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT) **Body Material Type:** Plastic Body

Contact Type: Expanded Beam Coupling Type: Screw

OM3 Fibre Mode: Flamability Rating: UL94V-0

Function: EB Flange Mount to SC Double Ended Fiber Cable IP68

Material Finish: Matt +80°C Max Operating Temperature: Min Operating Temperature: -50°C **Rohs Compliant:** Yes

Ip Rating:

// Product PDF Links 5000 Series Expanded Beam Product.

// Product 3D CAD Model Links PXEB5423C0013D CAD Model

Click Here To Contact Us

30mm

1