


# PXEB5480 Datasheet

## Product Name // 4 Channel Insert

[View Product Page](#)

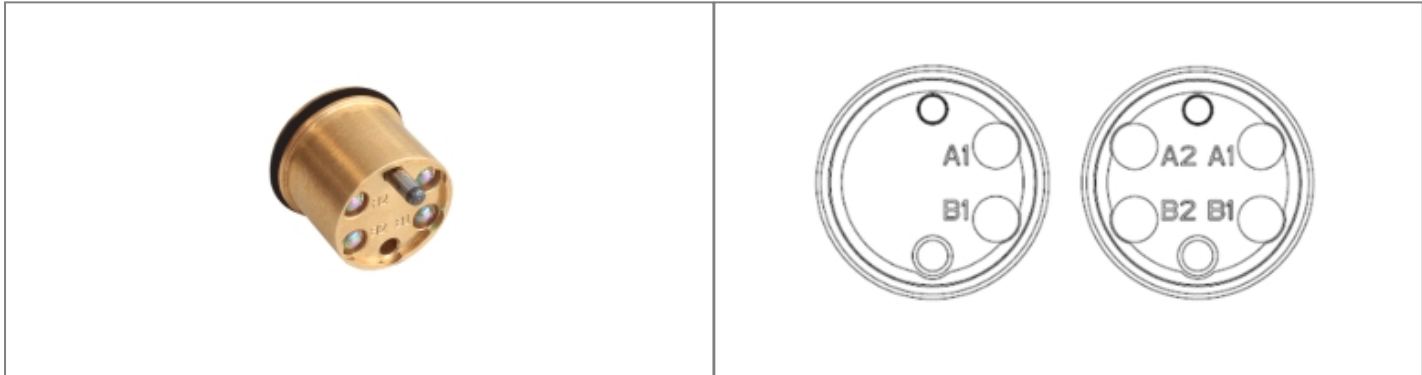

### // Product Description:

- ⬡ 4 Channel Insert
- ⬡ Designed to MIL-DTL83526D
- ⬡ Allows Plug, Jam Nut and Flange Mount to be re-terminated
- ⬡ Ferrules (termini) included to terminate the Fiber
- ⬡ Available in 2 Channel

### // General Information:


Product Display Title:	4 Channel Insert
Product Family:	Circular Fiber Connectors
Product Series:	5000 Series Expanded Beam
Max Insertion Loss:	<2dB
Avg Insertion Loss:	<1.5dB
Contact Type:	Expanded Beam
Fibre Mode:	MM
Function:	Accessory
Max Operating Temperature:	+80°C
Min Operating Temperature:	-50°C
Rohs Compliant:	Yes

**// Product PDF Links**

[5000 Series Expanded Beam Product...](#)

**// Product 3D CAD Model Links**

[PXEB54803D CAD Model](#)

 Have a question or project enquiry you'd like to talk to us about?

[Click Here To Contact Us](#)