
PXF4050 Datasheet



Product Name // No Cable, Flex fiber connector

View Product Page

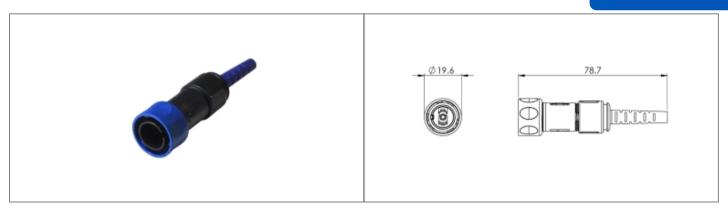

// Product Description:

- 0 Flex Fiber Connector
- 0 Sealed to IP66, IP68, IP69K when mated with compatible
- no cable options, or pre-terminated from 5M 450M available
- O Simplex LC type fiber connector

- O Choices of OS1, OM1 and OM3 cables for single or multimode
- O PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with Inline fiber connector or panel mount connectors PXF4051, PXF4053

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating:

Function: Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Flex Fiber Connector

Circular Fiber Connectors

4000 Series - Simplex LC Fiber Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

LC Fiber

30 Degree coupling

19.7mm

OS1

UL94V-0

Flex Fiber Connector IP66, IP68, IP69K

+70°C

-20°C

// Product PDF Links // Product 3D CAD Model Links



4000 Series Fiber connectors..

