
PXF4051 Datasheet



Product Name // No Cable, Inline fiber connector

View Product Page

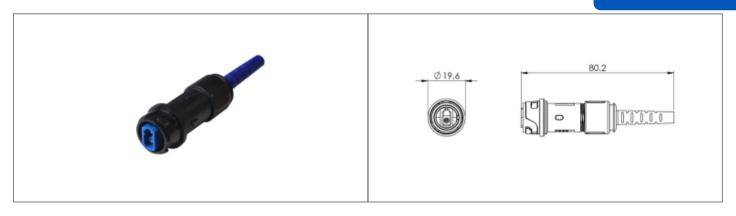

// Product Description:

- 0 Inline Fiber Connector
- 0 Sealed to IP66, IP68, IP69K when mated with compatible
- no cable options, or pre-terminated from 5M 450M available
- O Simplex LC type fiber connector

- O Choices of OS1, OM1 and OM3 cables for single or multimode
- 0 PXP4082 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with flex fiber connector PXF4050

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating:

Function: Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Inline Fiber Connector

Circular Fiber Connectors

4000 Series - Simplex LC Fiber Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

LC Fiber

30 Degree coupling 19.7mm

OS1

UL94V-0

Inline Fiber connector

IP66, IP68, IP69K

+70°C

-20°C



