
# PXF4055AAF Datasheet



## Product Name // 150 M, Single Mode, Cabled, Flex fiber connector



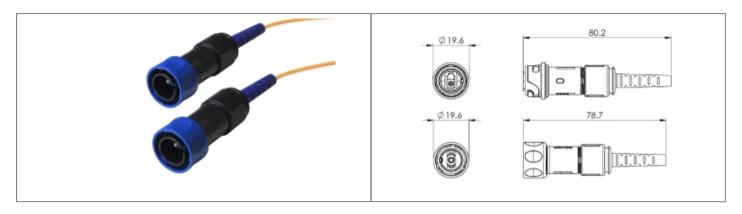

#### // Product Description:

- O Flex Fiber Connector to Flex Fiber Connector
- 0 Sealed to IP66, IP68, IP69K when mated with compatible connector
- 0 no cable options, or pre-terminated from 5M - 450M available
- 0 Simplex LC type fiber connector

- Ó Choices of OS1, OM1 and OM3 cables for single or multimode
- PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Inline fiber connector or panel mount connectors PXF4051, PXF4053

### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Material:** 

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Flex Fiber Connector to Flex Fiber Connector

Circular Fiber Connectors

4000 Series - Simplex LC Fiber Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

LC Fiber

30 Degree coupling

19.7mm OS1

UL94V-0

Flex to LC Connector Double Ended Fiber Cable

IP66, IP68, IP69K

+70°C

-20°C





4000 Series Fiber connectors...

#### // Product 3D CAD Model Links



PXF4055AAF3D CAD Model