
# **PXF4055BAJ Datasheet**

## Product Name // 450 M, Multimode, Cabled, Flex fiber

### connector

View Product Page

bulgin

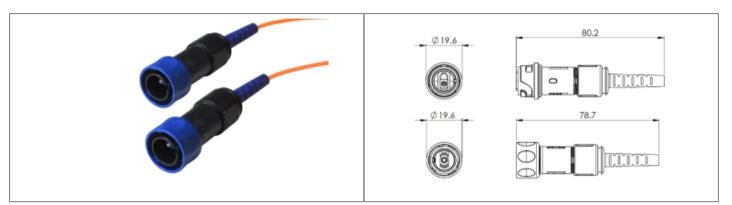

#### // Product Description:

- O Flex Fiber Connector to Flex Fiber Connector
- O Sealed to IP66, IP68, IP69K when mated with compatible connector
- O no cable options, or pre-terminated from 5M 450M available
- O Simplex LC type fiber connector

- O Choices of OS1, OM1 and OM3 cables for single or multimode
- O PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with Inline fiber connector or panel mount connectors PXF4051, PXF4053

#### // General Information:

Product Display Title: Product Family: Product Series: Body Material: Contact Type: Coupling Type: Diameter Over Coupling Ring Mm: Fibre Mode: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Flex Fiber Connector to Flex Fiber Connector Circular Fiber Connectors 4000 Series - Simplex LC Fiber Buccaneer Polycarbonate/Polybutylene Terephthalate (PC/PBT) LC Fiber 30 Degree coupling 19.7mm OM1 UL94V-0 Flex to LC Connector Double Ended Fiber Cable IP66, IP68, IP69K +70°C -20°C

#### // Product PDF Links

4000 Series Fiber connectors...

// Product 3D CAD Model Links

PXF4055BAJ3D CAD Model