
## **PXF6050A Datasheet**



# Product Name // No Cable, Flex fiber connector for OM3 cable





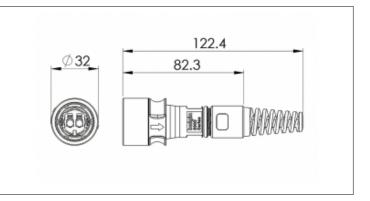

#### // Product Description:

- O Flex Fiber Connector
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- O no cable options, or pre-terminated from 5M 450M available
- O Duplex LC type fiber connector

- O Choices of OS1, OM1 and OM3 cables for single or multimode
- PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Inline fiber connector or panel mount connectors PXF6051, PXF6052

### // General Information:

Product Display Title: Product Family: Product Series: Body Material:

Body Material Type:
Contact Type:
Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode: Flamability Rating: Function:

Ip Rating:
Max Operating Temperature:
Min Operating Temperature:

Flex Fiber Connector
Circular Fiber Connectors

6000 Series - Duplex LC Fiber Buccaneer

Polyamide (PA)
Plastic Body
LC Fiber
30 Degree cour

30 Degree coupling

32mm OM3 UL94V-0

Flex Fiber Connector IP66, IP68, IP69K

+70°C -25°C

### // Product PDF Links



6000 Series Fiber connectors.