
PXF6050A Datasheet



Product Name // No Cable, Flex fiber connector for OM3 cable





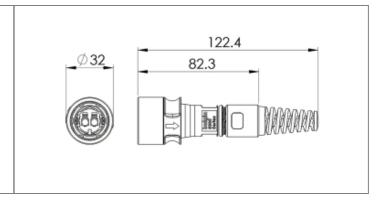

Product Description:

- 0 Flex Fiber Connector
- 0 Sealed to IP66, IP68, IP69K when mated with compatible connector
- 0 no cable options, or pre-terminated from 5M - 450M available
- 0 Duplex LC type fiber connector

- Choices of OS1, OM1 and OM3 cables for single or multimode
- O PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with Inline fiber connector or panel mount connectors PXF6051, PXF6052

// General Information:

Product Display Title: Product Family: **Product Series:**

Body Material: Body Material Type: Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode: Flamability Rating:

Function: Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Flex Fiber Connector Circular Fiber Connectors

6000 Series - Duplex LC Fiber Buccaneer

Polyamide (PA) Plastic Body LC Fiber

30 Degree coupling

32mm OM3 UI 94V-0

Flex Fiber Connector IP66, IP68, IP69K

+70°C -25°C

// Product PDF Links



// Product 3D CAD Model Links



PXF6050A3D CAD Model