
## **PXF6050B Datasheet**



## Product Name // No Cable, Flex fiber connector for OM1 cable



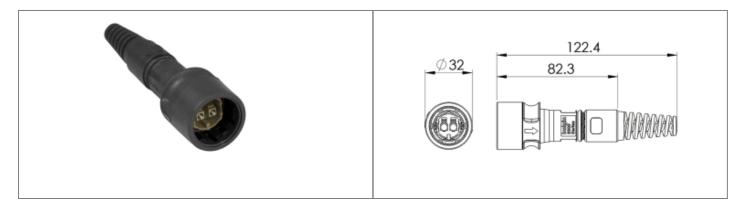

## // Product Description:

- Flex Fiber Connector
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- O no cable options, or pre-terminated from 5M 450M available
- O Duplex LC type fiber connector

- Choices of OS1, OM1 and OM3 cables for single or multimode
- PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Inline fiber connector or panel mount connectors PXF6051, PXF6052

## // General Information:

Product Display Title:

Product Family:

Product Series:

Body Material:

**Body Material Type:** 

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Flex Fiber Connector

Circular Fiber Connectors

6000 Series - Duplex LC Fiber Buccaneer

Polyamide (PA)

Plastic Body

LC Fiber

30 Degree coupling 32mm

OM1

)|V|| | || 0 4

UL94V-0

Flex Fiber Connector IP66, IP68, IP69K

+70°C

-25°C



