
PXF6050B Datasheet



Product Name // No Cable, Flex fiber connector for OM1 cable



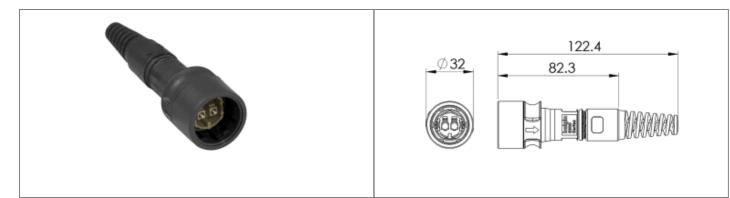

// Product Description:

- Flex Fiber Connector
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- O no cable options, or pre-terminated from 5M 450M available
- O Duplex LC type fiber connector

- O Choices of OS1, OM1 and OM3 cables for single or multimode
- PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Inline fiber connector or panel mount connectors PXF6051, PXF6052

// General Information:

Product Display Title: Product Family:

Product Series: Body Material:

Body Material Type: Contact Type:

Coupling Type:
Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating: Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Flex Fiber Connector Circular Fiber Connectors

6000 Series - Duplex LC Fiber Buccaneer

Polyamide (PA)
Plastic Body
LC Fiber

30 Degree coupling

32mm OM1 UL94V-0

Flex Fiber Connector IP66, IP68, IP69K

+70°C -25°C

// Product PDF Links



// Product 3D CAD Model Links



PXF6050B3D CAD Model