
PXF6052B Datasheet



Product Name // No Cable, Rear panel mount fiber connector for OM1 cable

View Product Page



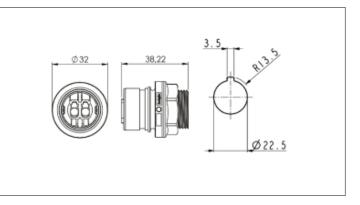

// Product Description:

- O Rear Panel Mount Fiber Connector
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- O no cable options, or pre-terminated 1M available
- O Duplex LC type fiber connector

- O Choices of OS1, OM1 and OM3 cables for single or multimode
- PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with flex fiber connector PXF6050

// General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Body Material:

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Fibre Mode:

Flamability Rating: Function:

runction

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Rear Panel Mount Fiber Connector

Circular Fiber Connectors

6000 Series - Duplex LC Fiber Buccaneer

No

Polyamide (PA)

LC Fiber

30 Degree coupling

32mm

OM1

UL94V-0

Rear Panel Mount to Double LC Connector Double Ended Fiber Cable

IP66, IP68, IP69K

+70°C

-25°C





// Product 3D CAD Model Links



PXF6052B3D CAD Model