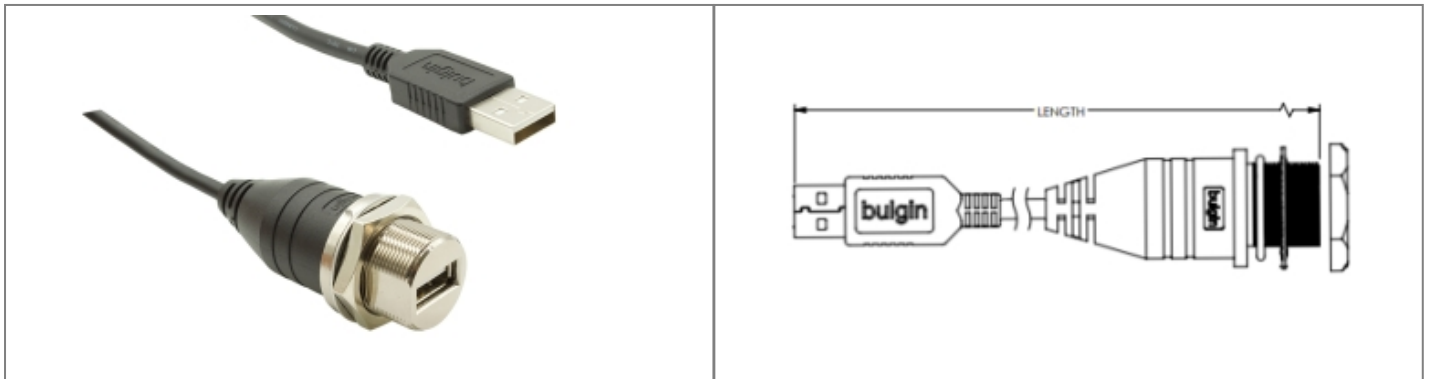


PXM0023/A/0M50/A Datasheet

Product Name // Metal Rear Panel Mount USB A Female to USB A Male Cable Assembly 0.5m

[View Product Page](#)


// Product Description:

- ⬢ IP67 Female USB A to Male USB A
- ⬢ IP67 when mated of fitted with Sealing Cap PXP0024, PXM0024
- ⬢ Plastic and metal sealing caps available
- ⬢ Mates with Plastic Flex USB A to USB A Cable Assembly PXP0020
- ⬢ Unmated shielding maintained when used with metal Sealing Cap PXM0024
- ⬢ USB 2.0 Performance
- ⬢ Length 0.5m

// General Information:

Product Display Title:	Rear Panel Mount / Leaded Connector
Product Family:	Circular Data Connectors
Product Series:	20 Series USB
Body Colour:	Black and Silver
Body Material:	Zinc Alloy
Body Material Type:	Metal Body
Cable Length:	0.5m
Contact Pin Material:	Copper, Gold plated
Contact Type:	Socket Contact
Coupling Type:	Screw
Data Cable Type:	USB 2.0 Sealed A Socket to Standard A Plug
Durability:	1500
Fixing Nut Material:	Metal
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount Connector
Ip Rating:	IP67
Max Operating Temperature:	80°C
Min Operating Temperature:	-10°C
Max Panel Thickness:	3.5-5mm
Number Of Contacts:	4 Contacts
Panel Cut Out:	20.8mm x 19.4mm
Rohs Compliant:	Yes
Sheath Colour:	Black
Sheath Material:	PVC
Thread Size:	13/16-28UN 2A
Voltage Max:	5V

// Product PDF Links

[20 Series USB Waterproof product...](#)

// Product 3D CAD Model Links

[PXM0023/A/0M50/A3D CAD Model](#)