
PXM0023/A/3M00/A Datasheet



Product Name // Metal Rear Panel Mount USB A Female to

USB A Male Cable Assembly 3m

🚯 View Product Page

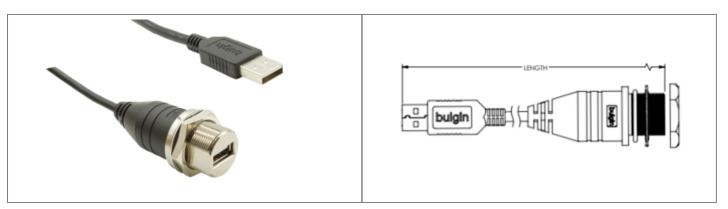

// Product Description:

- O IP67 Female USB A to Male USB A
- O IP67 when mated of fitted with Sealing Cap PXP0024, PXM0024
- O Plastic and metal sealing caps available
- O Mates with Plastic Flex USB A to USB A Cable Assembly PXP0020
- O Unmated shielding maintained when used with metal Sealing Cap PXM0024
- O USB 2.0 Performance
- O Length 3m

// General Information:

Product Display Title: Product Family: **Product Series:** Body Colour: **Body Material:** Body Material Type: Cable Length: Contact Pin Material: Contact Type: Coupling Type: Data Cable Type: Durability: Fixing Nut Material: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Number Of Contacts: Panel Cut Out: Rohs Compliant: Sheath Colour: Sheath Material: Thread Size: Voltage Max:

Rear Panel Mount / Leaded Connector **Circular Data Connectors** 20 Series USB Black and Silver Zinc Allov Metal Body 3m Copper, Gold plated Socket Contact Screw USB 2.0 Sealed A Socket to Standard A Plug 1500 Metal UL94V-0 Rear Panel Mount Connector IP67 80°C -10°C 3.5-5mm 4 Contacts 20.8mm x 19.4mm Yes Black PVC 13/16-28UN 2A 5V

// Product PDF Links

20 Series USB Waterproof product...

