
PXM0023/A/5M00/A Datasheet



Product Name // Metal Rear Panel Mount USB A Female to USB A Male Cable Assembly 5m





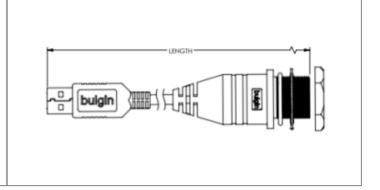

// Product Description:

- O IP67 Female USB A to Male USB A
- O IP67 when mated of fitted with Sealing Cap PXP0024, PXM0024
- O Plastic and metal sealing caps available
- Mates with Plastic Flex USB A to USB A Cable Assembly PXP0020
- Unmated shielding maintained when used with metal Sealing Cap PXM0024
- O USB 2.0 Performance
- O Length 5m

// General Information:

Product Display Title: Rear Panel Mount / Leaded Connector

Product Family: Circular Data Connectors

Product Series: 20 Series USB

Is Vitalis:

Body Colour:Black and SilverBody Material:Zinc AlloyBody Material Type:Metal BodyCable Length:5mContact Pin Material:Copper, Gold plated

Contact Type:Socket ContactCoupling Type:ScrewData Cable Type:USB 2.0 Sealed A Socket to Standard A PlugDurability:1500

Fixing Nut Material: Metal
Flamability Rating: UL94V-0

Function: Rear Panel Mount Connector

Ip Rating:IP67Max Operating Temperature:80°CMin Operating Temperature:-10°CMax Panel Thickness:3.5-5mmNumber Of Contacts:4 Contacts

Number Of Contacts:4 ContactsPanel Cut Out:20.8mm x 19.4mmRohs Compliant:Yes

Sheath Material: PVC
Thread Size: 13/16-28UN 2A

Voltage Max:

Black

5V

// Product PDF Links

Sheath Colour:



// Product 3D CAD Model Links

