
# PXM0600NSANBK4868 Datasheet



## Product Name // Black Anodised Aluminium Plug Connector with Cap - Cable Entry: 4.82-6.85mm

View Product Page

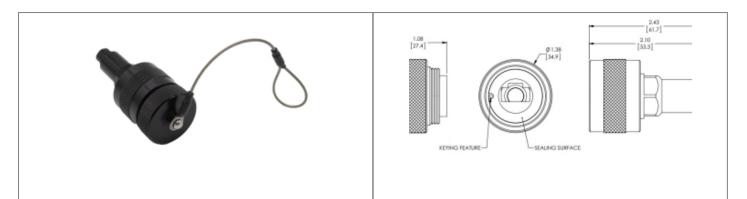

#### // Product Description:

- O Black Anodised Aluminium Plug Connector with Cap Cable Entry: 4.82-6.85mm
- O IP68 rated when mated
- O Crimp Terminals
- O Durability >500 cycles

- O Operating temperature -40°C to +100°C
- O Supports 10, 100 and 1,000 Mbps data transmissions
- O POE, POE+, and POE++
- Hardware: Stainless Steel, Seals: Silicone, Lanyard: Stainless Steel (Nylon coated & 6.0" length)

### // General Information:

Product Display Title:
Product Family:
Product Series:
Is Vitalis:
Body Colour:
Body Length:
Body Material:
Body Material Type:
Connection Method:
Contact Type:
Coupling Type:
Diameter Over Coupling Ring Mm:
Durability:
Ethernet Category:
Function:
Ip Rating:
Material Finish:
Max Cable Entry Size:
Min Cable Entry Size:
Min Operating Temperature:
Operating Humidity:
Max Operating Frequency:
Rohs Compliant:
Salt Spray Corrosion Test:
Shock Resistance:

Black Anodised Aluminium Plug Connector with Cap - Cable Entry: 4.82-6.85mm Circular Data Connectors 600 Series - Ethernet Buccaneer Connectors No Black 61.7mm Aluminium Metal Body Standard RJ45 cable to be sourced Male Screw 35mm >500 cycles Any Plug Connector IP68 Anodised 6.88mm 4.83mm -40°C 43°C - 98% +100°C Yes 500hr 100G - 6ms

#### // Product PDF Links

Standard Series USB connectors

// Product 3D CAD Model Links

PXM0600NSANBK48683D CAD Model