
## PXM0608NSANBK4868 Datasheet



## Product Name // Black Anodised Transversely Sealed Aluminium Inline Plug Connector - Cable Entry: 4.82-6.85mm

View Product Page

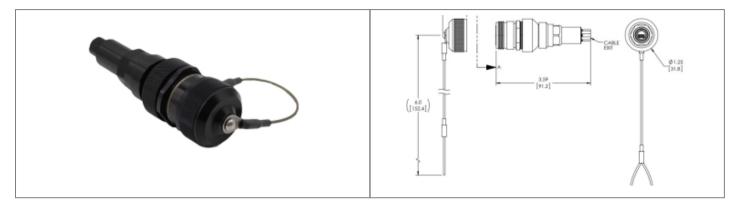

## // Product Description:

- O Black Anodised Transversely Sealed Aluminium Inline Plug Connector - Cable Entry: 4.82-6.85mm
- O Comes with Cap and grounding shield
- O IP68 rated even without a mate or dust Cap
- O Crimp Terminals
- O Durability >500 cycles

- Operating temperature -40°C to +100°C
- O Supports 10, 100 and 1,000 Mbps data transmissions
- O POE, POE+, and POE++
- Hardware: Stainless Steel, Seals: Silicone, Lanyard: Stainless Steel (Nylon coated)

## // General Information:

Product Display Title: Black Anodised Transversely Sealed Aluminium Inline Plug Connector -

Cable Entry: 4.82-6.85mm

Product Family: Circular Data Connectors

Product Series: 600 Series - Ethernet Buccaneer Connectors

Body Colour: Black

Body Length: 91.2mm

Body Material: Aluminium

Body Material Type: Metal Body

Connection Method: Standard RJ45 cable to be sourced

Contact Type:FemaleCoupling Type:ScrewDiameter Over Coupling Ring Mm:35mmDurability:>500 cyclesEthernet Category:Any

Function: Inline
Ip Rating: IP68
Material Finish: Anoc
Max Cable Entry Size: 6.88r
Min Cable Entry Size: 4.83r
Min Operating Temperature: -40°C
Operating Humidity: 43°C
Max Operating Frequency: +100
Rohs Compliant: Yes
Salt Spray Corrosion Test: 500h

Inline Plug Connector

Anodised 6.88mm 4.83mm -40°C 43°C - 98% +100°C Yes 500hr 100G - 6ms

// Product PDF Links

**Shock Resistance:** 



