
PXM6010/02P/CR/0910/SN Datasheet bulgin



Product Name // Flex Cable Connector PXM6010 Series 2 **Contact Plug Crimp/Solder Termination (contacts available** separately) 9mm-10mm Cable (Light Grey Gland) Metal **Body With Braid Termination**



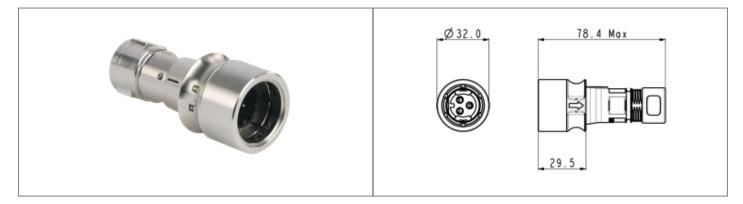

// Product Description:

- Flex Cable Connectors 0
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Plug
- O 2 Contacts
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Metal Body With Braid Termination
- 0 Cable acceptance 9mm-10mm diameter
- Gland Pack PXP6088 available separately to accomodate all sizes
- PXM6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6011 Series Inline and PXM6012 Series Front Panel Mount Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Colour:

Body Material: Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2:

Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Rohs Compliant:

Salt Spray Corrosion Test: Voltage Max:

Flex Cable Connectors

Circular Power Connectors

6000 Series Buccaneer UL

Metallic Grey

Brass

Metal Body With Braid Termination

Plug Contact Push-Twist

16A, 11A

32mm

Flex Cable Connector >106MΩ @500V DC IP66, IP68, IP69K

10mm

14AWG

18AWG 2.5mm2

0.75mm2

+120°C

-40°C 2 Contacts

EN60068-2-11 Test Ka Salt Mist



