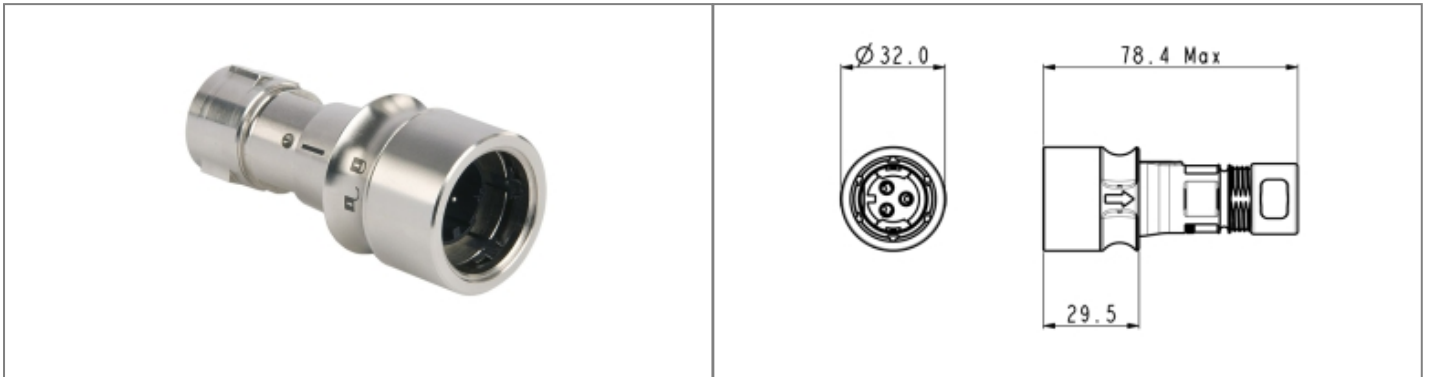













**Product Name // Flex Cable Connector PXM6010 Series 3  
Contact Plug Crimp/Solder Termination (contacts available  
separately) 4mm-5mm Cable (Dark Grey Gland) Metal Body  
With Braid Termination**

 [View Product Page](#)



#### // Product Description:

-  Flex Cable Connectors
-  Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
-  30 degree push twist locking, tamperproof lock prevents accidental un-mating
-  Plug
-  3 Contacts
-  Crimp/solder termination with contacts and fitting tool available separately
-  Metal Body With Braid Termination
-  Cable acceptance 4mm-5mm diameter
-  Gland Pack PXP6088 available separately to accommodate all sizes
-  PXM6081 Sealing Cap available separately to maintain IP rating of unmated connectors
-  Mate with PXM6011 Series Inline and PXM6012 Series Front Panel Mount Connectors

#### // General Information:

Product Display Title:	Flex Cable Connectors
Product Family:	Circular Power Connectors
Product Series:	6000 Series Buccaneer
Approvals:	UL
Body Colour:	Metallic Grey
Body Material:	Brass
Body Material Type:	Metal Body With Braid Termination
Contact Type:	Plug Contact
Coupling Type:	Push-Twist
Current Max:	16A, 11A
Diameter Over Coupling Ring Mm:	32mm
Function:	Flex Cable Connector
Insulation Resistance:	>10 <sup>6</sup> MΩ @500V DC
Ip Rating:	IP66, IP68, IP69K
Max Cable Entry Size:	5mm
Min Cable Entry Size:	4mm
Max Contact Accomodation Awg:	14AWG
Min Contact Accomodation Awg:	18AWG
Max Contact Accomodation Mm2:	2.5mm <sup>2</sup>
Min Contact Accomodation Mm2:	0.75mm <sup>2</sup>
Max Operating Temperature:	+120°C
Min Operating Temperature:	-40°C
Number Of Contacts:	3 Contacts
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	EN60068-2-11 Test Ka Salt Mist
Voltage Max:	277V

#### // Product PDF Links

 [6000 Series power connectors...](#)

 [6000 Series metal body power...](#)

#### // Product 3D CAD Model Links

 [PXM6010/03P/CR/0405/SN3D CAD Model](#)