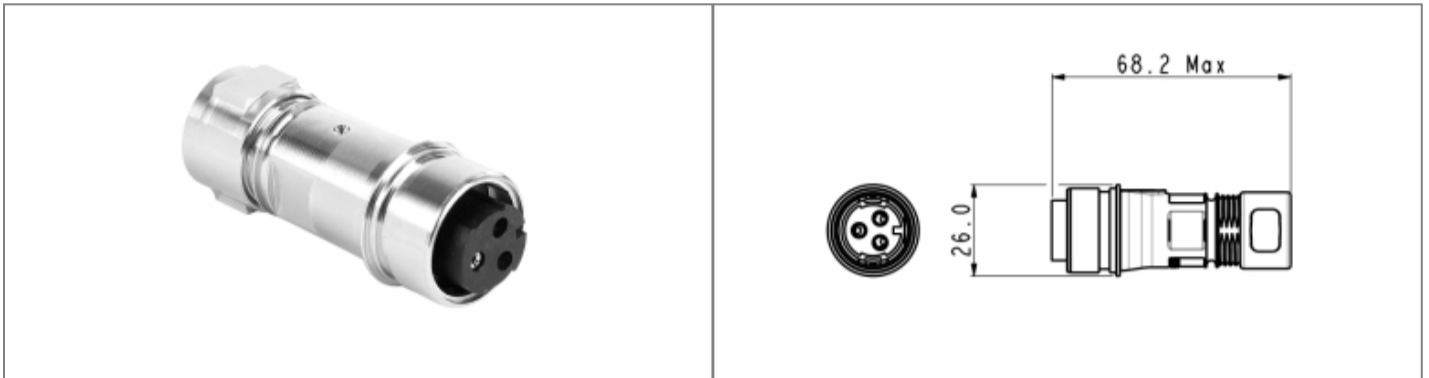


**Product Name // Inline Cable Connector PXM6011 Series 2**  
**Contact Plug Screw Termination (contacts supplied fitted)**  
**5mm-7mm Cable (White Gland) Metal Body With Braid**  
**Termination**

[View Product Page](#)


### // Product Description:

- ⊕ Inline Cable Connectors
- ⊕ Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- ⊕ 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- ⊕ Plug
- ⊕ 2 Contacts
- ⊕ Screw contacts supplied fitted
- ⊕ Metal Body With Braid Termination
- ⊕ Cable acceptance 5mm-7mm diameter
- ⊕ Gland Pack PXP6088 available separately to accommodate all sizes
- ⊕ PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊕ Mate with PXM6010 Series Flex Connectors

### // General Information:

Product Display Title:	Inline Cable Connectors
Product Family:	Circular Power Connectors
Product Series:	6000 Series Buccaneer
Approvals:	UL
Body Colour:	Metallic Grey
Body Material:	Brass
Body Material Type:	Metal Body With Braid Termination
Contact Type:	Plug Contact
Coupling Type:	Push-Twist
Current Max:	16A, 11A
Diameter Over Coupling Ring Mm:	32mm
Function:	Inline Cable Connector
Insulation Resistance:	>10 <sup>6</sup> MΩ @500V DC
Ip Rating:	IP66, IP68, IP69K
Max Cable Entry Size:	7mm
Min Cable Entry Size:	5mm
Max Contact Accommodation Awg:	16AWG
Min Contact Accommodation Awg:	18AWG
Max Contact Accommodation Mm2:	1.5mm <sup>2</sup>
Min Contact Accommodation Mm2:	0.75mm <sup>2</sup>
Max Operating Temperature:	+120°C
Min Operating Temperature:	-40°C
Number Of Contacts:	2 Contacts
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	EN60068-2-11 Test Ka Salt Mist
Voltage Max:	277V

#### // Product PDF Links

[6000 Series power connectors...](#)
[6000 Series metal body power...](#)

#### // Product 3D CAD Model Links

[PXM6011/02P/ST/0507/SN3D CAD Model](#)


Have a question or project enquiry  
you'd like to talk to us about?

[Click Here To Contact Us](#)