
Circular Power Connectors / 6000 Series Buccaneer

PXM6011/02S/CR/0405/SN Datasheet

View Product Page

Product Name // Inline Cable Connector PXM6011 Series 2 **Contact Socket Crimp/Solder Termination (contacts** available separately) 4mm-5mm Cable (Dark Grey Gland) **Metal Body With Braid Termination**

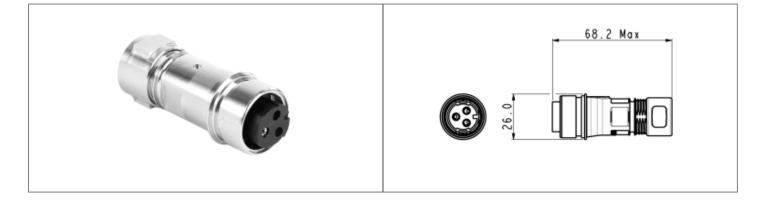

// Product Description:

- Inline Cable Connectors 0
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- O 2 Contacts
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Metal Body With Braid Termination
- 0 Cable acceptance 4mm-5mm diameter
- 0 Gland Pack PXP6088 available separately to accomodate all sizes
- 0 PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title: Product Family: **Product Series:** Approvals: Body Colour: **Body Material: Body Material Type:** Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Function: Insulation Resistance: Ip Rating: Max Cable Entry Size: Min Cable Entry Size: Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: **Rohs Compliant:** Salt Spray Corrosion Test: Voltage Max:

Inline Cable Connectors **Circular Power Connectors** 6000 Series Buccaneer UL Metallic Grey Brass Metal Body With Braid Termination Socket Contact Push-Twist 16A, 11A 32mm Inline Cable Connector >10⁶MΩ @500V DC IP66, IP68, IP69K 5mm 4mm 14AWG 18AWG 2.5mm2 0.75mm2 +120°C -40°C 2 Contacts Yes EN60068-2-11 Test Ka Salt Mist

// Product PDF Links 6000 Series power connectors.. L A L

6000 Series metal body power...

// Product 3D CAD Model Links

PXM6011/02S/CR/0405/SN3D CAD Model

277V

Have a question or project enquiry you'd like to talk to us about?

