
PXM6011/03S/CR/0709/SN Datasheet bulgin



Product Name // Inline Cable Connector PXM6011 Series 3 **Contact Socket Crimp/Solder Termination (contacts** available separately) 7mm-9mm Cable (Yellow Gland) Metal **Body With Braid Termination**



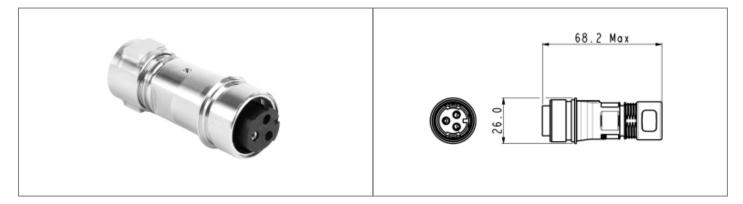

// Product Description:

- Inline Cable Connectors 0
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- 0 3 Contacts
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Metal Body With Braid Termination
- 0 Cable acceptance 7mm-9mm diameter
- Gland Pack PXP6088 available separately to accomodate all
- PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Colour:

Body Material: Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awg:

Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:** Rohs Compliant:

Salt Spray Corrosion Test:

Voltage Max:

Inline Cable Connectors Circular Power Connectors 6000 Series Buccaneer

UL

Metallic Grey

Brass

Metal Body With Braid Termination

Socket Contact Push-Twist 16A, 11A

32mm

Inline Cable Connector >106MΩ @500V DC IP66, IP68, IP69K

9mm

14AWG 18AWG 2.5mm2 0.75mm2 +120°C -40°C 3 Contacts

EN60068-2-11 Test Ka Salt Mist

// Product PDF Links 6000 Series power connectors.. 6000 Series metal body power...

// Product 3D CAD Model Links PXM6011/03S/CR/0709/SN3D CAD Model