
PXM6011/03S/CR/0910/SN Datasheet bulgin



Product Name // Inline Cable Connector PXM6011 Series 3 **Contact Socket Crimp/Solder Termination (contacts** available separately) 9mm-10mm Cable (Light Grey Gland) **Metal Body With Braid Termination**



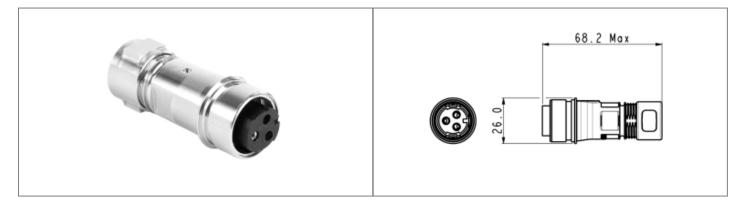

// Product Description:

- 0 Inline Cable Connectors
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- 0 3 Contacts
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Metal Body With Braid Termination
- 0 Cable acceptance 9mm-10mm diameter
- Gland Pack PXP6088 available separately to accomodate all
- PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type: **Current Max:**

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awg:

Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Rohs Compliant:

Salt Spray Corrosion Test:

Voltage Max:

Inline Cable Connectors

Circular Power Connectors 6000 Series Buccaneer

UL

Metallic Grey

Brass

Metal Body With Braid Termination

Socket Contact Push-Twist

16A, 11A

32mm

Inline Cable Connector

>106MΩ @500V DC

IP66, IP68, IP69K

10mm

14AWG

18AWG

2.5mm2

0.75mm2 +120°C

-40°C

3 Contacts

EN60068-2-11 Test Ka Salt Mist



