
PXM6011/08P/CR/0405/SN Datasheet bulgin



Product Name // Inline Cable Connector PXM6011 Series 8 Contact Plug Crimp/Solder Termination (contacts available separately) 4mm-5mm Cable (Dark Grey Gland) Metal Body **With Braid Termination**





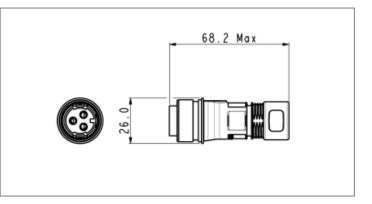

// Product Description:

- Inline Cable Connectors 0
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Plug
- 0 8 Contacts
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Metal Body With Braid Termination
- 0 Cable acceptance 4mm-5mm diameter
- Gland Pack PXP6088 available separately to accomodate all
- PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type: **Current Max:**

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2:

Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Salt Spray Corrosion Test:

Voltage Max:

Rohs Compliant:

Inline Cable Connectors Circular Power Connectors 6000 Series Buccaneer

UL

Metallic Grey

Brass

Metal Body With Braid Termination

Plug Contact Push-Twist 10A, 4A, 7A

32mm

Inline Cable Connector >106MΩ @500V DC IP66, IP68, IP69K


5mm 18AWG 20AWG

0.75mm2 0.5mm2 +120°C -40°C

8 Contacts

EN60068-2-11 Test Ka Salt Mist

// Product PDF Links 6000 Series power connectors..



6000 Series metal body power...