
PXM6012/22P/CR Datasheet

Product Name // Front Panel Mount Connector PXM6012 Series 22 Pole Plug Crimp/Solder Termination (contacts available separately) Metal Body

View Product Page



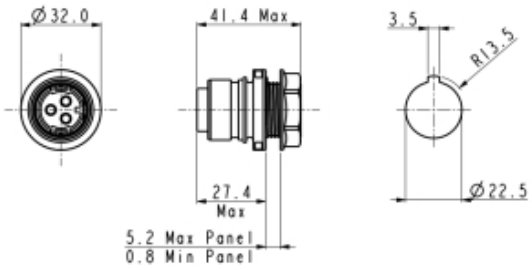

// Product Description:

- Front Panel Mount Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Plug or Socket
- 2, 3, 8, 16, 22 Pole with leading Earth contact on 3 Pole versions
- Screw, Crimp/Solder terminations available, depending on part code; Screw contacts supplied fitted, Crimp/Solder contacts and fitting tools available separately
- Choice of body material depending on part code:
- Plastic body (part codes prefixed PXP)
- Metal body (part codes prefixed PXM)
- PXP6083/PXM6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP6010/PXM6010 Series Flex Connectors

// General Information:

Product Display Title:	Front Panel Mount Connectors
Product Family:	Circular Power Connectors
Product Series:	6000 Series Buccaneer
Approvals:	UL,cUL,VDE
Body Colour:	Metallic Grey
Body Material:	Brass
Body Material Type:	Metal Body
Contact Type:	Plug
Coupling Type:	Push-Twist
Current Max:	2A (VDE)/3A (UL)/1.5A (cUL)
Diameter Over Coupling Ring Mm:	32mm
Flamability Rating:	N/A
Function:	Front Panel Mount Connector
Insulation Resistance:	>10^6MΩ @500V DC
Ip Rating:	IP66,IP68,IP69K
Max Contact Accomodation Awg:	22AWG
Min Contact Accomodation Awg:	26AWG
Max Contact Accomodation Mm2:	0.34mm2
Min Contact Accomodation Mm2:	0.14mm2
Max Operating Temperature:	+120°C
Min Operating Temperature:	-40°C
Max Panel Thickness:	5.2mm
Min Panel Thickness:	0.8mm
Number Of Contacts:	22
Panel Cut Out:	22.50xR13.5-3.5mm
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	EN60068-2-11 Test Ka Salt Mist
Thread Size:	M22x1.5-6g
Voltage Max:	60V

// Product PDF Links

6000 Series power connectors...

6000 Series metal body power...

// Product 3D CAD Model Links

PXM6012/22P/CR3D CAD Model