
PXMBNI12FBF03ASCPG9 Datasheet



Product Name // M12 Series A Code Brass Nickel Plated PG9 Flex Body 3 Contact Socket





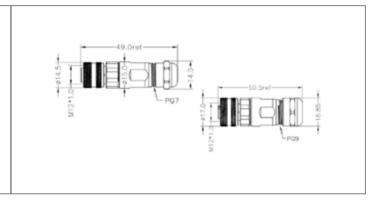

// Product Description:

- O M12 Series Brass Nickel Plated Inline Body Connectors
- Water and dustproof to IP67 when mated with compatible connector
- O Socket only
- Q 3, 4, 5, 8, 12 Contact (3, 8, 12 Contact are A Code, 4 Contact are choice of A Code A or D Code, 5 Contact are choice of A Code or B Code)
- O Solder Terminals
- O Choice of gland nut sizes, depending on part code
- O Choice of Sealing Caps available separately to maintain IP rating of unmated connectors
- O Mate with M12 Series Inline Body and Panel Mount Connectors

// General Information:

Product Display Title: Product Family:

Product Series:

Approvals:

Body Material:

Contact Type:

Coupling Type: Current Max:

Diameter Over Coupling Ring Mm:

Function:

Ip Rating:

M12 Series Mounting Nut:

Max Operating Temperature:

Min Operating Temperature: Number Of Contacts:

Pin Lavout Code:

Thread Size:

Voltage Max:

M12 Series Brass Nickel Plated Inline Body Connectors

Circular Automation Connectors

M12 Series

CSA, UL

Brass - Nickel Plated

Socket Contact

Screw 4A

20mm

Flex Cable Connector Body

IP67


PG9

+80°C -25°C

3 Contacts

A Code M12 x 1

250V





/12 Series automation connectors

// Product 3D CAD Model Links



PXMBNI12FBF03ASCPG93D CAD Model