
### PXP0023/A/0M25/FL Datasheet



## Product Name // Rear Panel Mount USB A Female to Flying Leads 0.25m





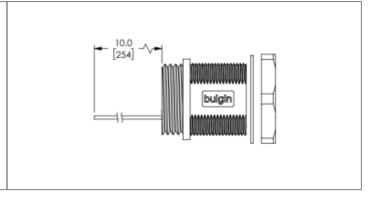

#### // Product Description:

- O IP67 Female USB A to Flying Leads
- O IP67 when mated or fitted with Sealing Cap PXP0024, PXM0024
- O Flying leads 0.25m long
- O 24AWG flying leads

- O Plastic and metal Sealing Caps available
- Mates with Plastic Flex USB A to USB A Cable Assembly PXP0020
- O USB 2.0 Performance
- O Length 0.25m

20 Series USB

#### // General Information:

**Product Series:** 

Product Display Title: Rear Panel Mount / Leaded Connector

Product Family: Circular Data Connectors

Is Vitalis: No
Body Colour: Black

Body Material:PVCBody Material Type:Plastic BodyCable Length:0.25m

Contact Pin Material:Copper, Gold platedContact Type:Socket ContactCoupling Type:Screw

Data Cable Type:

USB 2.0 Sealed A Socket to Flying Leads

Durability:

1,500

Fixing Nut Material: Plastic
Flamability Rating: UL94V-0

Function: Rear Panel Mount Connector

 Ip Rating:
 IP67

 Max Operating Temperature:
 80°C

 Min Operating Temperature:
 -20°C

 Max Panel Thickness:
 3.5-5mm

 Number Of Contacts:
 4 Contacts

 Panel Cut Out:
 30.8mm x 19.4mm

Panel Cut Out:20.8mm x 19.4mmRohs Compliant:Yes

Thread Size: 13/16-28UN 2A Voltage Max: 5V

# // Product PDF Links 20 Series USB Waterproof product...

