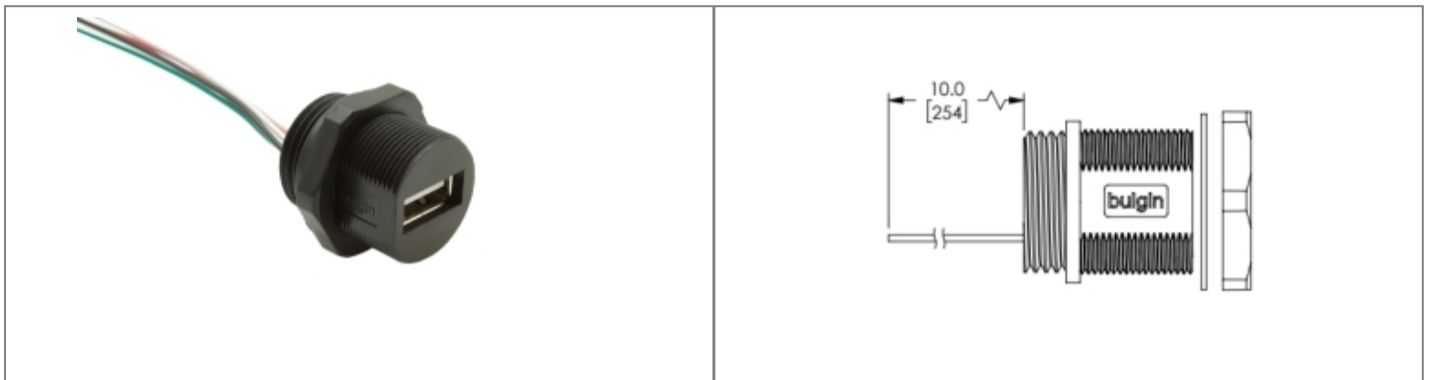


PXP0023/A/0M25/FL Datasheet

Product Name // Rear Panel Mount USB A Female to Flying Leads 0.25m

[View Product Page](#)


// Product Description:

- ⊕ IP67 Female USB A to Flying Leads
- ⊕ IP67 when mated or fitted with Sealing Cap PXP0024, PXM0024
- ⊕ Flying leads 0.25m long
- ⊕ 24AWG flying leads
- ⊕ Plastic and metal Sealing Caps available
- ⊕ Mates with Plastic Flex USB A to USB A Cable Assembly PXP0020
- ⊕ USB 2.0 Performance
- ⊕ Length 0.25m

// General Information:

Product Display Title:	Rear Panel Mount / Leaded Connector
Product Family:	Circular Data Connectors
Product Series:	20 Series USB
Body Colour:	Black
Body Material:	PVC
Body Material Type:	Plastic Body
Cable Length:	0.25m
Contact Pin Material:	Copper, Gold plated
Contact Type:	Socket Contact
Coupling Type:	Screw
Data Cable Type:	USB 2.0 Sealed A Socket to Flying Leads
Durability:	1,500
Fixing Nut Material:	Plastic
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount Connector
Ip Rating:	IP67
Max Operating Temperature:	80°C
Min Operating Temperature:	-20°C
Max Panel Thickness:	3.5-5mm
Number Of Contacts:	4 Contacts
Panel Cut Out:	20.8mm x 19.4mm
Rohs Compliant:	Yes
Thread Size:	13/16-28UN 2A
Voltage Max:	5V

// Product PDF Links

[20 Series USB Waterproof product...](#)

// Product 3D CAD Model Links

[PXP0023/A/0M25/FL3D CAD Model](#)