


# PXP0023/A/0M50/A Datasheet

**Product Name // Plastic Rear Panel Mount USB A Female to USB A Male Cable Assembly 0.5m**

[View Product Page](#)

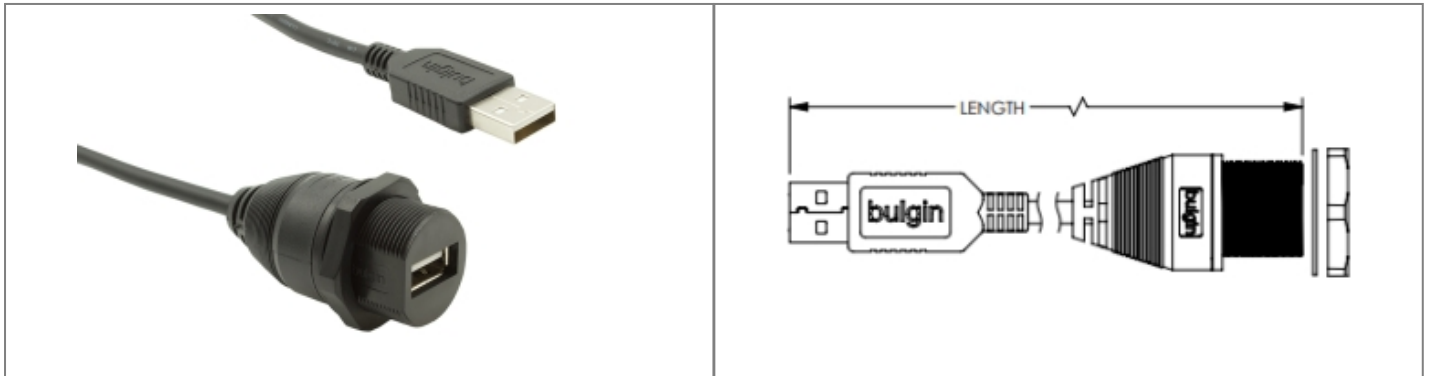

## // Product Description:

- ⊞ IP67 Female USB A to Male USB A
- ⊞ IP67 when mated or fitted with Sealing Cap PXP0024, PXM0024
- ⊞ Plastic and metal Sealing Caps available
- ⊞ Mates with Plastic Flex USB A to USB A Cable Assembly PXP0020
- ⊞ USB 2.0 Performance
- ⊞ Length 0.5m

## // General Information:

Product Display Title:	Rear Panel Mount / Leaded Connector
Product Family:	Circular Data Connectors
Product Series:	20 Series USB
Body Colour:	Black
Body Material:	PVC
Body Material Type:	Plastic Body
Cable Length:	0.5m
Contact Pin Material:	Copper, Gold plated
Contact Type:	Socket Contact
Coupling Type:	Screw
Data Cable Type:	USB 2.0 Sealed A Socket to Standard A Plug
Durability:	1500
Fixing Nut Material:	Plastic
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount Connector
Ip Rating:	IP67
Max Operating Temperature:	80°C
Min Operating Temperature:	-10°C
Max Panel Thickness:	3.5-5mm
Number Of Contacts:	4 Contacts
Panel Cut Out:	20.8mm x 19.4mm
Rohs Compliant:	Yes
Sheath Colour:	Black
Sheath Material:	PVC
Thread Size:	13/16-28UN 2A
Voltage Max:	5V

### // Product PDF Links

[20 Series USB Waterproof product...](#)

### // Product 3D CAD Model Links

[PXP0023/A/0M50/A3D CAD Model](#)



Have a question or project enquiry you'd like to talk to us about?



[Click Here To Contact Us](#)