
PXP4002/002/02S Datasheet



Product Name // Pre-wired Flex Cable Connector - Right Angle - 2m - 2 Contacts - Socket





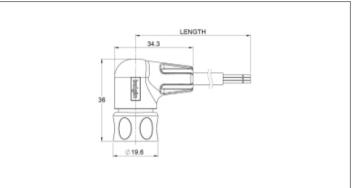

// Product Description:

- 0 Pre-Wired Flex Cable Connector - Right Angle
- Q Water and dustproof to IP68 when mated with compatible connector
- 0 4000 Series Buccaneer to blunt cut wire
- 0 2m Cable Length

- O 2 Contacts Socket
- O Sealing Cap available separately to maintain IP rating of unmated connectors
- Mates with front and rear panel mounting connectors and inline cable connectors

General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Colour:

Body Material:

Body Material Type:

Cable Length:

Contact Type: Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts:

Rohs Compliant: Voltage Max:

Pre-Wired Flex Cable Connector

Circular Power Connectors

4000 Series Buccaneer

cUL, UL, VDE

Black

Polyamide (PA)

Plastic Body

Socket Contact

Bayonet Lock 13A

19.7mm

UL94V-0

Flex Cable Connector

IP66, IP67, IP68 +120°C

-30°C

2 Contacts

Yes 600V

// Product PDF Links



4000 Series power connectors

// Product 3D CAD Model Links



PXP4002/002/02S3D CAD Model