


# PXP4010/04P/3540 Datasheet

**Product Name // Flex Cable Connector PXP4010 Series 4**  
**Contact Plug 3.5mm-4.0mm Cable**

[View Product Page](#)

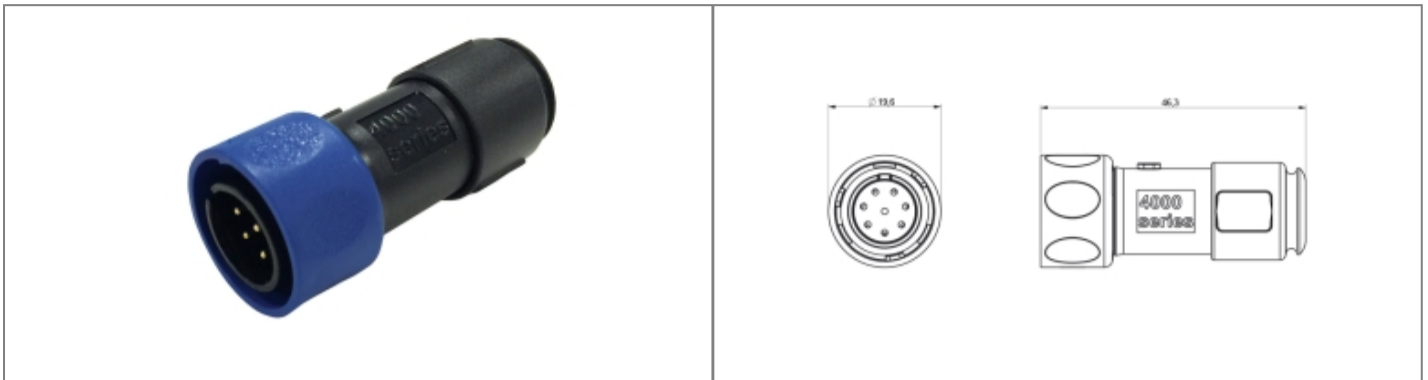

## // Product Description:

- ⊞ Flex Cable Connector
- ⊞ Sealed to IP66, IP68, IP69K when mated with compatible connector
- ⊞ Pin or Socket
- ⊞ 2, 3, 4, 6, 8, 10 or 12 Contact
- ⊞ Crimp or Solder Contacts available (supplied separately; use 13A/10A for 2, 3 Contact, 8A/5A for 4, 6, 8 Contact, 3A/3A for 10, 12 Contact)
- ⊞ Contact insertion and crimp tools available (supplied separately)
- ⊞ Choice of cable acceptance 3mm-7mm depending on part code; supplied with Cable Gland and Collet colour coded by size, Cable Glands and Collets also available separately
- ⊞ PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊞ Mate with Inline or Panel Mount Connectors PXP4011, PXP4013

## // General Information:

Product Display Title:	Flex Cable Connector
Product Family:	Circular Power Connectors
Product Series:	4000 Series Buccaneer
Approvals:	UL
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Body Material Type:	Plastic Body
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	8A
Diameter Over Coupling Ring Mm:	19.7mm
Flamability Rating:	UL94V-0
Function:	Flex Cable Connector
Ip Rating:	IP66
Max Cable Entry Size:	4.0mm
Min Cable Entry Size:	3.5mm
Max Contact Accomodation Awg:	20AWG
Min Contact Accomodation Awg:	18AWG
Max Contact Accomodation Mm2:	0.75mm <sup>2</sup>
Min Contact Accomodation Mm2:	0.5mm <sup>2</sup>
Max Operating Temperature:	+120°C
Min Operating Temperature:	-40°C
Number Of Contacts:	4 Contacts
Pin Layout Code:	X Code
Voltage Max:	320V

### // Product PDF Links

[4000 Series power connectors...](#)

[4000 Series power connectors...](#)

### // Product 3D CAD Model Links

[PXP4010/04P/35403D CAD Model](#)

### // Product Certificate Links

[UL & CSA EN214792 - 4000 Series...](#)

[VDE Certificate - 4000 Series...](#)

[IP68 Test Certificate - 4000...](#)

[IP69X Test Certificate - 4000...](#)

[Salt Spray Test Certificate - 4000...](#)