
PXP4040/B/2M00 Datasheet



Product Name // Fully Overmoulded USB Cable PXP4040 Series USB Standard A Plug To Sealed Micro B Plug 2M Cable



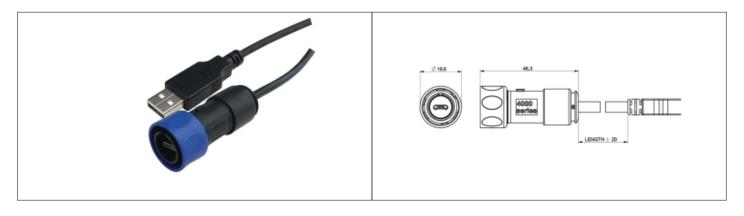

// Product Description:

- 0 Pre-Wired Fully Overmoulded USB V2.0 Cable
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- 0 Standard USB Type A plug to Sealed Micro USB Type B plug
- O Choice of cable lengths depending on part code
- O PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PXP4043 Rear Panel Mount Connector

General Information:

Product Display Title: Product Family:

Product Series:

Body Material:

Cable Length:

Contact Type:

Coupling Type: **Current Max:**

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts: Voltage Max:

Pre-Wired Fully Overmoulded USB V2.0 Cable

Circular Data Connectors

4000 Series - Micro USB Buccaneer

PVC

Plug Contact

Screw

1A

USB Standard A Plug To Sealed Micro B Plug

19.7mm

UL94V-0

Flex to Standard Connector Double Ended Cable

IP66, IP68, IP69K

+70°C

0°C

5 Contacts

42V





// Product 3D CAD Model Links



PXP4040/B/2M003D CAD Model