
# PXP4040/B/2M00 Datasheet



## Product Name // Fully Overmoulded USB Cable PXP4040 Series USB Standard A Plug To Sealed Micro B Plug 2M Cable



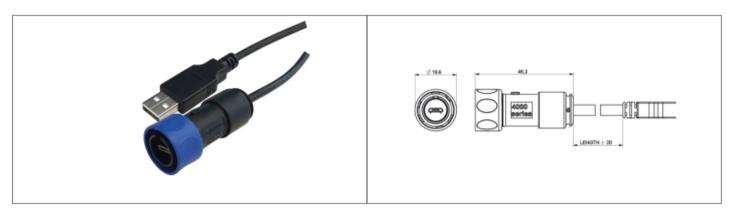

#### // Product Description:

- Pre-Wired Fully Overmoulded USB V2.0 Cable
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- Standard USB Type A plug to Sealed Micro USB Type B plug
- O Choice of cable lengths depending on part code
- PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP4043 Rear Panel Mount Connector

### // General Information:

Product Display Title: Product Family:

Product Series:

Is Vitalis:

Body Material:

Cable Length:

Contact Type:

Coupling Type:

Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Pre-Wired Fully Overmoulded USB V2.0 Cable

Circular Data Connectors

4000 Series - Micro USB Buccaneer

No

PVC

2m Plug Contact

Screw

۸

1A

USB Standard A Plug To Sealed Micro B Plug

19.7mm

UL94V-0

Flex to Standard Connector Double Ended Cable

IP66, IP68, IP69K

+70°C

0°C

5 Contacts

42V

#### // Product PDF Links



1000 Series USB data connectors

// Product 3D CAD Model Links



PXP4040/B/2M003D CAD Model