
# PXP4040/B/5M00 Datasheet



# Product Name // Fully Overmoulded USB Cable PXP4040 Series USB Standard A Plug To Sealed Micro B Plug 5M Cable



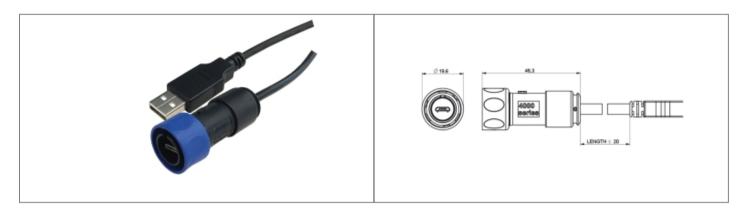

### // Product Description:

- O Pre-Wired Fully Overmoulded USB V2.0 Cable
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- O Standard USB Type A plug to Sealed Micro USB Type B plug
- O Choice of cable lengths depending on part code
- PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP4043 Rear Panel Mount Connector

#### // General Information:

Product Display Title: Pre-Wired Fully Overmoulded USB V2.0 Cable

Product Family: Circular Data Connectors

Product Series: 4000 Series - Micro USB Buccaneer

Body Material: PVC
Contact Type: Plug Contact
Coupling Type: Screw

Current Max:1AData Cable Type:USB Standard A Plug To Sealed Micro B Plug

Diameter Over Coupling Ring Mm:19.7mmFlamability Rating:UL94V-0

Function: Flex to Standard Connector Double Ended Cable Ip Rating: IP66, IP68, IP69K

Max Operating Temperature: +70°C

Min Operating Temperature:0°CNumber Of Contacts:5 ContactsVoltage Max:42V

# // Product PDF Links

4000 Series USB data connectors...

# // Product 3D CAD Model Links

PXP4040/B/5M003D CAD Model

Click Here To Contact Us