


PXP4040/C/A/2M00 Datasheet

Product Name // Fully Overmoulded USB Cable

PXP4040/C/A Series USB Standard A Plug To Sealed C-Type Plug 2m Cable

 [View Product Page](#)

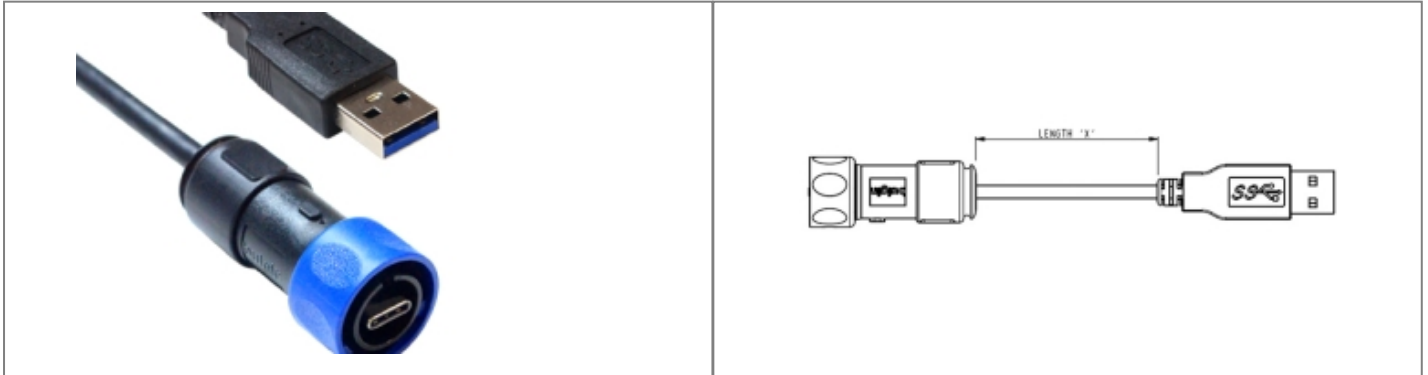

// Product Description:

-  Pre-Wired C-Type USB V3.2 Gen 1x2 Cable
-  Standard USB Type A plug to Sealed C-Type USB plug
-  Sealed to IP66, IP67, IP68, IP69K when mated with compatible connector
-  2m cable length
-  PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
-  Mate with PXP4043/C Rear Panel Mount Connector

// General Information:

Product Display Title:	Pre-Wired C-Type USB V3.2 Gen 1x2 Cable
Product Family:	Circular Data Connectors
Product Series:	4000 Series - C-Type USB Buccaneer
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Cable Length:	2m
Contact Type:	Plug Contact
Coupling Type:	Bayonet Lock
Flamability Rating:	UL94V-0
Function:	Flex to Standard Connector Double Ended Cable
Ip Rating:	IP67, IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	-40°C
Number Of Contacts:	24 Contacts

// Product PDF Links

 [C-Type Technical Product Datasheet](#)

// Product 3D CAD Model Links

 [PXP4040/C/A/2M003D CAD Model](#)