
PXP4040/C/A/2M00 Datasheet



Product Name // Fully Overmoulded USB Cable PXP4040/C/A Series USB Standard A Plug To Sealed C-Type Plug 2m Cable





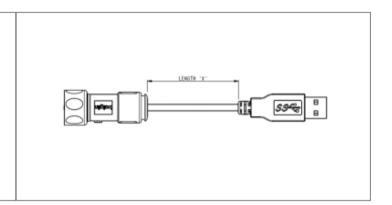

// Product Description:

- Pre-Wired C-Type USB V3.2 Gen 1x2 Cable
- Standard USB Type A plug to Sealed C-Type USB plug
- 0 Sealed to IP66, IP67, IP68, IP69K when mated with compatible connector
- 2m cable length
- O PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Ó Mate with PXP4043/C Rear Panel Mount Connector

General Information:

Product Display Title:

Product Family: **Product Series:**

Body Material:

Cable Length: Contact Type:

Coupling Type:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Pre-Wired C-Type USB V3.2 Gen 1x2 Cable

Circular Data Connectors

4000 Series - C-Type USB Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plug Contact Bayonet Lock

UL94V-0

Flex to Standard Connector Double Ended Cable

IP67, IP68, IP69K

+70°C

-40°C

24 Contacts

// Product PDF Links







PXP4040/C/A/2M003D CAD Model