
# PXP6010/22S/CR/0405 Datasheet

## Product Name // Flex Cable Connector PXP6010 Series 22 Contact Socket Crimp/Solder Termination (contacts available separately) 4mm-5mm Cable (Dark Grey Gland) Plastic Body

View Product Page



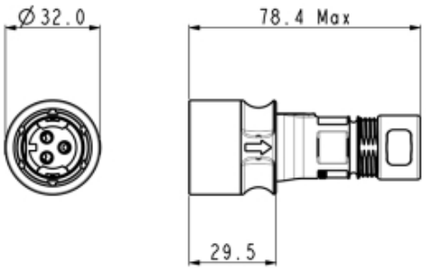


## // Product Description:

- Flex Cable Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Socket
- 22 Contacts
- Crimp/solder termination with contacts and fitting tool available separately
- Plastic Body
- Cable acceptance 4mm-5mm diameter
- Gland Pack PXP6088 available separately to accomodate all sizes
- PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP6011 Series Inline, PXP6012 and PXP6014 Series Front Panel Mount Connectors

## // General Information:

| | |
|---|---|
| **Product Display Title:** | Flex Cable Connectors |
| **Product Family:** | Circular Power Connectors |
| **Product Series:** | 6000 Series Buccaneer |
| **Approvals:** | UL |
| **Body Colour:** | Grey |
| **Body Material:** | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| **Body Material Type:** | Plastic Body |
| **Contact Type:** | Socket Contact |
| **Coupling Type:** | Push-Twist |
| **Current Max:** | 1.5A, 2A, 3A |
| **Diameter Over Coupling Ring Mm:** | 32mm |
| **Flamability Rating:** | UL94V-0 |
| **Function:** | Flex Cable Connector |
| **Insulation Resistance:** | >10?M? @500V DC |
| **Ip Rating:** | IP66, IP68, IP69K |
| **Max Cable Entry Size:** | 5mm |
| **Min Cable Entry Size:** | 4mm |
| **Max Contact Accomodation Awg:** | 22AWG |
| **Min Contact Accomodation Awg:** | 26AWG |
| **Max Contact Accomodation Mm2:** | 0.34mm2 |
| **Min Contact Accomodation Mm2:** | 0.14mm2 |
| **Max Operating Temperature:** | +120°C |
| **Min Operating Temperature:** | -40°C |
| **Number Of Contacts:** | 22 Contacts |
| **Rohs Compliant:** | Yes |
| **Salt Spray Corrosion Test:** | EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 |
| **Voltage Max:** | 60V |

### // Product PDF Links

6000 Series power connectors...

6000 Series metal body power...

### // Product 3D CAD Model Links

PXP6010/22S/CR/04053D CAD Model