
PXP6014/02S/CR Datasheet



Product Name // Screwed Front Panel Mount Connector PXM6014 Series 2 Contact Socket Crimp/Solder Termination (contacts available separately) Plastic Body

View Product Page



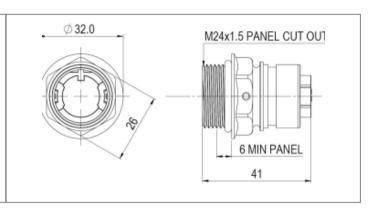

// Product Description:

- Screwed Front Panel Mount Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Socket
- O 2 Contacts

- Crimp/solder termination with contacts and fitting tool available separately
- O Plastic Body
- PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Colour: Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insulation Resistance:

Ip Rating:

Max Contact Accomodation Awg:
Min Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Min Contact Accomodation Mm2:
Max Operating Temperature:

Min Operating Temperature: Min Panel Thickness: Number Of Contacts: Panel Cut Out: Rohs Compliant:

Salt Spray Corrosion Test:

Thread Size: Voltage Max: Screwed Front Panel Mount Connectors

Circular Power Connectors 6000 Series Buccaneer

Grey

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body Socket Contact Push-Twist 32mm UL94V-0

Front Panel Mount Connector

 $>10^6 M\Omega$ @500V DC IP66, IP68, IP69K

14AWG 18AWG 1.5mm2 0.75mm2 +120°C -40°C 6mm 2 Contacts M24x1.5 Yes

EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

M24x1.5 277V

// Product PDF Links 6000 Series power connectors...

