
PXP6014/04S/CR Datasheet



Product Name // Screwed Front Panel Mount Connector PXM6014 Series 4 Contact Socket Crimp/Solder Termination (contacts available separately) Plastic Body

View Product Page



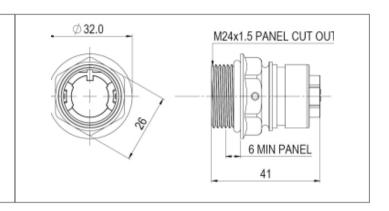

// Product Description:

- 0 Screwed Front Panel Mount Connectors
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- 0 4 Contacts

- Crimp/solder termination with contacts and fitting tool available separately
- 0 Plastic Body
- PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PXP6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series: Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insulation Resistance:

Ip Rating:

Max Contact Accomodation Awg: Min Contact Accomodation Awg:

Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature:

Min Operating Temperature: Min Panel Thickness: **Number Of Contacts:** Panel Cut Out: **Rohs Compliant:**

Salt Spray Corrosion Test:

Thread Size: Voltage Max: Screwed Front Panel Mount Connectors

Circular Power Connectors

6000 Series Buccaneer

Grey

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body Socket Contact Push-Twist 32mm

UL94V-0 Front Panel Mount Connector

>106MΩ @500V DC

IP66, IP68, IP69K

18AWG 20AWG 0.75mm2 0.5mm2 +120°C -40°C 6mm 4 Contacts

EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

M24x1.5 277V



