
PXP6038/B/2M00 Datasheet



Product Name // Plastic Body Overmould Flex Connector PXP6037-PXP6038 Series Pre-Wired Patch Cord IP Rated RJ45 to IP Rated RJ45 2M Cable

View Product Page

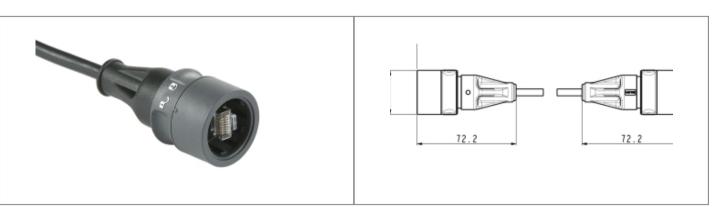

// Product Description:

- Pre-Wired Patch Cord with plastic body overmoulded connector
- O Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- O 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- O Supplied with shielded RJ45 plug
- O S-FTP cable construction
- O PUR jacket cable in a choice of lengths depending on part code
- O 568-B wiring configuration
- O Exceeds EIA/TIA CAT5e
- Available as IP rated RJ45 to Shielded RJ45 (PXP6037), IP rated RJ45 to IP rated RJ45 (PXP6038)
- O PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PXP6033TP, PXP6033TP/E Plastic Body Front Panel Mount CAT5e Couplers

// General Information:

Product Display Title: Product Family: Product Series: Approvals: **Body Material:** Cable Length: Contact Type: Coupling Type: **Current Max:** Data Cable Type: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:

Pre-Wired Patch Cord with plastic body overmoulded connector Circular Data Connectors 6000 Series - Ethernet Buccaneer CSA, UL, VDE Polycarbonate/Polybutylene Terephthalate (PC/PBT) 2m Plug Contact Push-Twist 1.5A IP Rated RJ45 to IP Rated RJ45 32mm UL94V-0 Flex to Flex Connector Double Ended Cable IP66, IP68, IP69K +120°C -40°C 8 Contacts 42V

// Product PDF Links

6000 Series Ethernet connectors...

// Product 3D CAD Model Links

PXP6038/B/2M003D CAD Model