
## PXP6040/AA/2M00 Datasheet



## Product Name // Plastic Body Overmoulded USB Cable Standard 2.0 A Plug to Sealed 2.0 A Plug 2M Cable





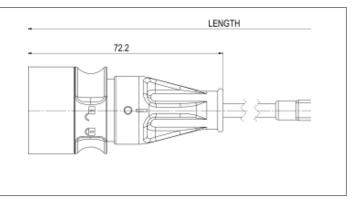

## // Product Description:

- O Pre-Wired Plastic Body Overmoulded USB 2.0 Cable
- Water and dustproof to IP68 & IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Choice of USB A, B & C connections

- O Choice of cable lengths
- PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with 6000 Series Plastic Body USB Panel Mount Connectors

## // General Information:

Product Display Title:

Product Family: Product Series: Approvals: Body Material: Body Material Type:

Cable Length:
Contact Type:
Coupling Type:
Current Max:
Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating: Function:

Ip Rating:
Max Operating Temperature:
Min Operating Temperature:

Min Operating Temperature: Number Of Contacts: Voltage Max: Plastic Body Overmoulded USB Cable Standard 2.0 A Plug to Sealed 2.0

A Plug 2M Cable

Circular Data Connectors 6000 Series - USB Buccaneer

CSA, UL, VDE

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

2m

Plug Contact Push-Twist

1A

Standard 2.0 A Plug to Sealed 2.0 A Plug

32mm UL94V-0

Flex to Standard Connector Double Ended Cable

IP66, IP68, IP69K

+70°C 0°C 4 Contacts

// Product PDF Links

6000 Series HDMI Product Data

// Product 3D CAD Model Links



PXP6040/AA/2M003D CAD Model