
PXP6040/AA/5M00 Datasheet



Product Name // Plastic Body Overmoulded USB Cable Standard 2.0 A Plug to Sealed 2.0 A Plug 5M Cable

View Product Page

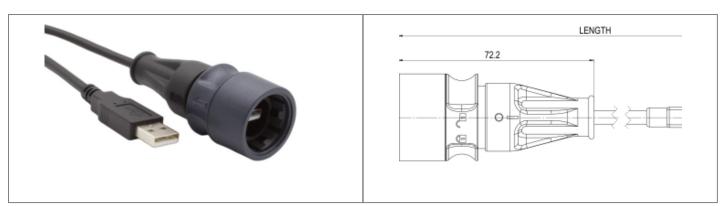

// Product Description:

- O Pre-Wired Plastic Body Overmoulded USB 2.0 Cable
- O Water and dustproof to IP68 & IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- O Choice of USB A, B & C connections

- O Choice of cable lengths
- O PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with 6000 Series Plastic Body USB Panel Mount Connectors

// General Information:

Product Display Title:

Product Family: **Product Series:** Approvals: **Body Material:** Body Material Type: Cable Length: Contact Type: Coupling Type: Current Max: Data Cable Type: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:

Plastic Body Overmoulded USB Cable Standard 2.0 A Plug to Sealed 2.0 A Plug 5M Cable Circular Data Connectors 6000 Series - USB Buccaneer CSA, UL, VDE Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body 5m Plug Contact Push-Twist 1A Standard 2.0 A Plug to Sealed 2.0 A Plug 32mm UL94V-0 Flex to Standard Connector Double Ended Cable IP66, IP68, IP69K +70°C 0°C 4 Contacts 30V

// Product PDF Links

6000 Series HDMI Product Data

// Product 3D CAD Model Links

PXP6040/AA/5M003D CAD Model