
PXP6040/AA3/5M00 Datasheet



Product Name // Plastic Body Overmoulded USB Cable Standard 3.0 A Plug to Sealed 3.0 A Plug 5M Cable





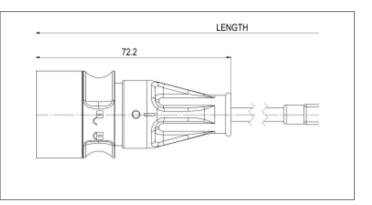

// Product Description:

- O Pre-Wired Plastic Body Overmoulded USB 3.0 Cable
- Water and dustproof to IP68 & IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Choice of USB A, B & C connections

- O Choice of cable lengths
- PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with 6000 Series Plastic Body USB Panel Mount Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Body Material:

Is Vitalis: Approvals:

Body Material Type: Cable Length: Contact Type:

Coupling Type: Current Max: Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function: lp Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max: Plastic Body Overmoulded USB Cable Standard 3.0 A Plug to Sealed 3.0

A Plug 5M Cable
Circular Data Connectors
6000 Series - USB Buccaneer

No

CSA, UL, VDE

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

5m

Plug Contact Push-Twist

1A

Standard 3.0 A Plug to Sealed 3.0 A Plug

32mm UL94V-0

Flex to Standard Connector Double Ended Cable

IP66, IP68, IP69K

+70°C 0°C 8 Contacts 30V

// Product PDF Links

6000 Series HDMI Product Data

// Product 3D CAD Model Links



PXP6040/AA3/5M003D CAD Model