
PXP6043/B Datasheet



Product Name // Plastic Body Front Panel Mount Leaded **USB Connector PXP6043 Series Sealed B Socket Front of Panel To 5 Way Crimp Connector**





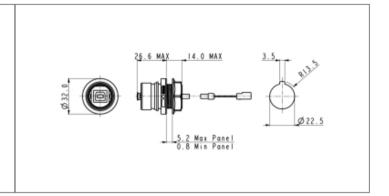

// Product Description:

- 0 Plastic Body Front Panel Mount Leaded Connector
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Sealed Standard USB socket to 125mm long cable terminated in 5 way crimp connector for use with PCB header (available separately, part code 14191, 14192)
- PXP6043/A has Sealed Standard USB Type A socket on front of panel
- O PXP6043/B has Sealed Standard USB Type B socket on front of panel
- 0 PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP6040, PXP6041 Plastic Body USB Cables

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material: Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Voltage Max:

Plastic Body Front Panel Mount Leaded Connector

Circular Data Connectors

6000 Series - USB Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

Socket Contact

Push-Twist

1A

Sealed B Socket to 5 Way Crimp

32mm

UL94V-0

Front Panel Mount Connector

IP66, IP68, IP69K

+120°C

-40°C

4 Contacts

30V

// Product PDF Links



6000 Series USB connectors product..

// Product 3D CAD Model Links



PXP6043/B3D CAD Model