
PXPPVC08FBF03ACL010PVC Datasheet

Product Name // M8 Series A Code PVC Overmould Flex **Body Cable Connector 3 Contact Socket Pre-Wired With 1M PVC Jacket Cable**





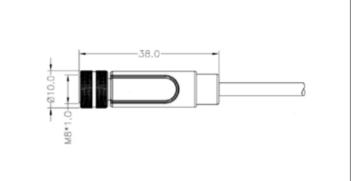

// Product Description:

- 0 M8 Series In-Line Overmould Flex Body Connectors
- 0 Water and dustproof to IP67 when mated with compatible connector
- Socket only

- 0 3, 4, 5 Contact (3, 4 Contact are A Code, 5 Contact are B Code)
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- Mate with M8 Series Inline Body and Panel Mount Connectors

// General Information:

Product Display Title: M8 Series In-Line Overmould Flex Body Connectors

Product Family: Circular Automation Connectors

Product Series: M8 Series

CSA, ENEC, UL, VDE Approvals:

Body Material: PVC Cable Length: 1m

Contact Type: Socket Contact

Coupling Type: Screw **Current Max:** ЗА

Diameter Over Coupling Ring Mm: 12.5mm Flex Connector Single Ended Cable Function:

IP67

+80°C Max Operating Temperature: Min Operating Temperature: -25°C **Number Of Contacts:** 3 Contacts

Pin Layout Code: A Code Sheath Material: PVC Thread Size: M8 x 1

// Product PDF Links

Voltage Max:

M8 Series automation connectors..

// Product 3D CAD Model Links

PXPPVC08FBF03ACL010PVC3D CAD Mode

60V