
PXPPVC08FBF03ACL150PVC Datasheet



Product Name // M8 Series A Code PVC Overmould Flex **Body Cable Connector 3 Contact Socket Pre-Wired With** 15M PVC Jacket Cable



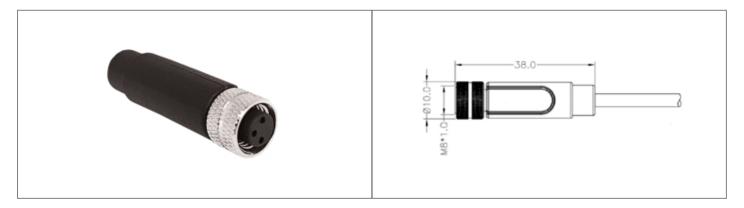

// Product Description:

- 0 M8 Series In-Line Overmould Flex Body Connectors
- 0 Water and dustproof to IP67 when mated with compatible connector
- Socket only

- 0 3, 4, 5 Contact (3, 4 Contact are A Code, 5 Contact are B Code)
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- Mate with M8 Series Inline Body and Panel Mount Connectors

// General Information:

Product Display Title: M8 Series In-Line Overmould Flex Body Connectors

Product Family: Circular Automation Connectors

Product Series: M8 Series CSA, UL Approvals: **Body Material: PVC** Cable Length: 15m

Contact Type: Socket Contact Coupling Type: Screw

Current Max: Diameter Over Coupling Ring Mm: 12.5mm

Flex Connector Single Ended Cable Function: IP67 Ip Rating:

+80°C Max Operating Temperature: Min Operating Temperature: -25°C **Number Of Contacts:** 3 Contacts Pin Layout Code: A Code Sheath Material: PVC Thread Size: M8 x 1

// Product PDF Links M8 Series automation connectors.. // Product 3D CAD Model Links PXPPVC08FBF03ACL150PVC3D CAD Mode

60V

ЗА

Voltage Max: