
PXPPVC12FBF03ACL020PVC Datasheet bulgin

Product Name // M12 Series A Code PVC Overmould Flex Body Cable Connector 3 Contact Socket Pre-Wired With 2M PVC Jacket Cable





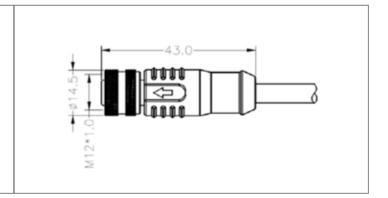

// Product Description:

- M12 Series Overmould Flex Body Connectors
- Water and dustproof to IP67 when mated with compatible connector
- Socket only
- Q 3, 4, 5, 8, 12 Contact (3, 8, 12 Contact are A Code, 4 Contact are choice of A Code or D Code, 5 Contact are choice of A Code or B Code)
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- Choice of Sealing Caps available separately to maintain IP rating of unmated connectors
- Mate with M12 Series Inline Body and Panel Mount Connectors

// General Information:

Product Display Title: Product Family:

Product Series:

Body Material:

Cable Length: Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

runction.

Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts:

Pin Layout Code: Sheath Material: Thread Size:

Voltage Max:

M12 Series Overmould Flex Body Connectors

Circular Automation Connectors

M12 Series

PVC

2m

Socket Contact

Screw 4A

20mm

Flex Connector Single Ended Cable

IP67 +80°C

-25°C

3 Contacts A Code

PVC

M12 x 1

250V

// Product PDF Links

M12 Series automation connectors.

// Product 3D CAD Model Links

PXPPVC12FBF03ACL020PVC3D CAD Mode